

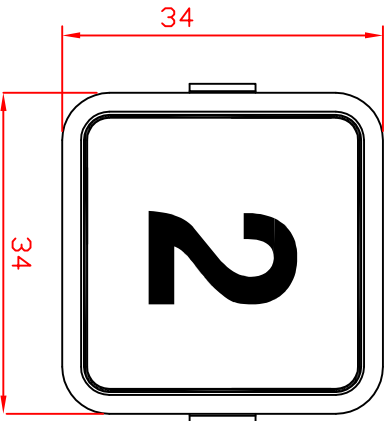
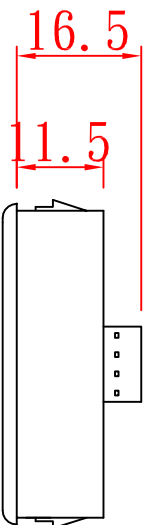


A4	mm	LENGTH	TOLERANCE						RAD./CHAM	TOLERANCE		ANGLE	TOLERANCE		
		0.5-10	10-30	30-100	100-350	350-1000	0.5-3	3-6	6-30	30-120	120-300	0.5-10	10-50	50-120	120-200
		±0.1	±0.2	±0.3	±0.5	±0.8	±0.2	±0.5	±1	±2	±4	±0.2	±0.5	±1	±2

PB12 按鈕裝配孔
PLATE CUT OUT



按鈕線路圖
BUTTON CIRCUIT

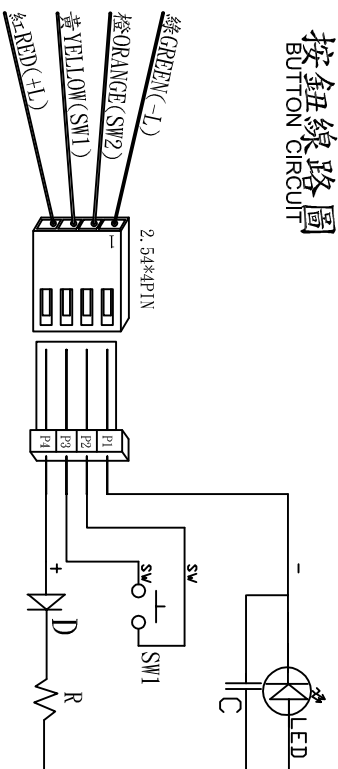

注意：
REMARK

電壓 VOLTAGE	DC12V OR DC24V
燈負載 LED LOAD	MAX 45mA OR 32mA
接點容量 CAPACITANCE	DC24V 50mA
附線線長 WIRE LENGTH	L=40cm
表面展示 FINISH	鋁面凸字亮框 ALUMINUM SURFACE BUIGE SIGN
燈色 LED LAMP	紅色 (RED) 綠色 (GREEN) 黃色 (YELLOW) 藍色 (BLUE)

圖面
按鈕 型式: PB12*03222T
FINISH BUTTON TYPE

審核 (APPROVE) 確認 (CHECKED) DATA PAGE
LIN YANG 2010/06/23 1/1
繪圖 (DRAWN)

通達機電有限公司
Tung Da Electric Co., Ltd

Arthur

圖號 (DWG. NO)
TD00PB12G