
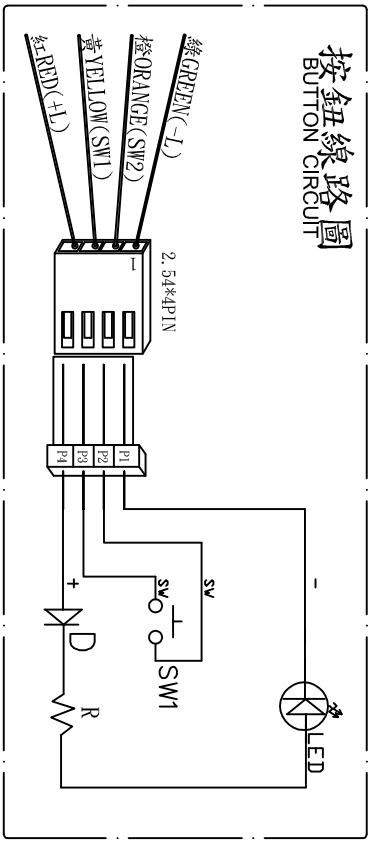
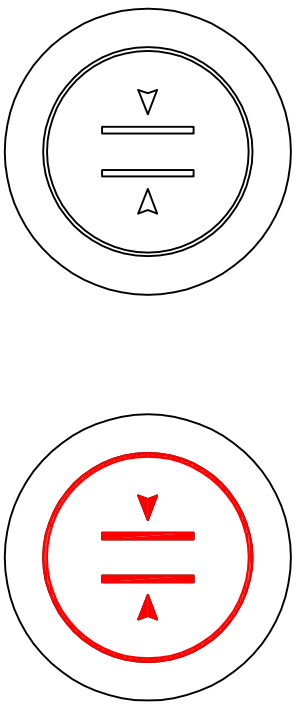


A4	mm	LENGTH	0.5-10	10-30	30-100	100-350	350-1000	RAD./CHAM	0.5-3	3-6	6-30	30-120	120-300	ANGLE	0.5-10	10-50	50-120	120-200
		TOLERANCE	±0.1	±0.2	±0.3	±0.5	±0.8	TOLERANCE	±0.2	±0.5	±1	±2	±4	TOLERANCE	±0.2	±0.5	±1	±2

PB21 按鈕裝配孔
PLATE CUT OUT

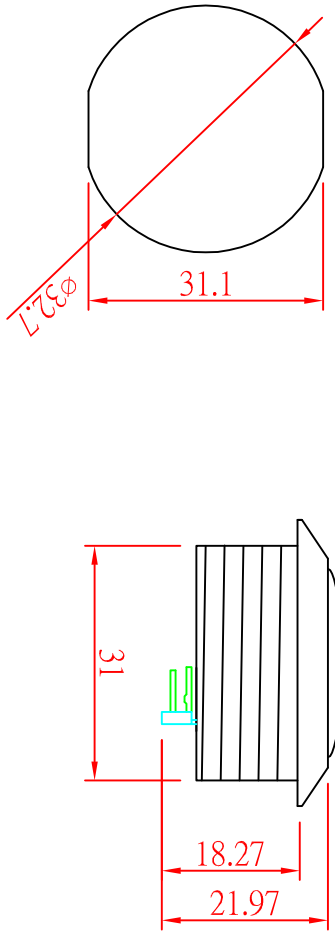

注意：
REMARK

電壓 VOLTAGE	DC18V ~ DC28V
燈負載 LED LOAD	MAX 20mA
接點容量 CAPACITANCE	DC24V 50mA
附線線長 WIRE LENGTH	L=40cm
表面展示 FINISH	閃亮銀紅字乳白框,凸面,按壓後亮字亮框! Round, flush, Convex type, Illuminated floor number & frame!
燈色 LED LAMP	紅色 (RED)

圖面	圖式: PB21R523C	審核 (APPROVE)	確認 (CHECKED)	DATA	PAGE
按鈕 BUTTON	型式: PB21R523C	LIN	YANG	2010/06/23	1/1
繪圖 (DRAWN)	通達機電有限公司 Tung Da Electric Co., Ltd	Arthur	圖號 (DWG. NO)	TD00PB21C	